


Model 801 Adapter TV 140 CENTER LINK EXTENSION INSTALLATION INSTRUCTIONS

1. Remove existing center link mount from TV 140 tractor.
2. a. Replace the 3-point hitch center link supplied with adapter with original New Holland center link support (C) and spacer plates that came with the tractor.
NOTE: Do not tighten hardware.
b. Install new support (A) using 28mm clevis pin (B) and lynch pin supplied with kit.
c. Bolt new support (A) to back of tractor using two 3/4 NC x 1-3/4" bolts and lockwashers (D) as shown.
d. Install center link (E) in the lowest hole in center link support, using New Holland pin as shown.
NOTE: To prevent damage to the center link support, use New Holland pin supplied with tractor to secure the center link to the support. Use the MacDon pin (B) supplied in kit in place of the N.H pin.

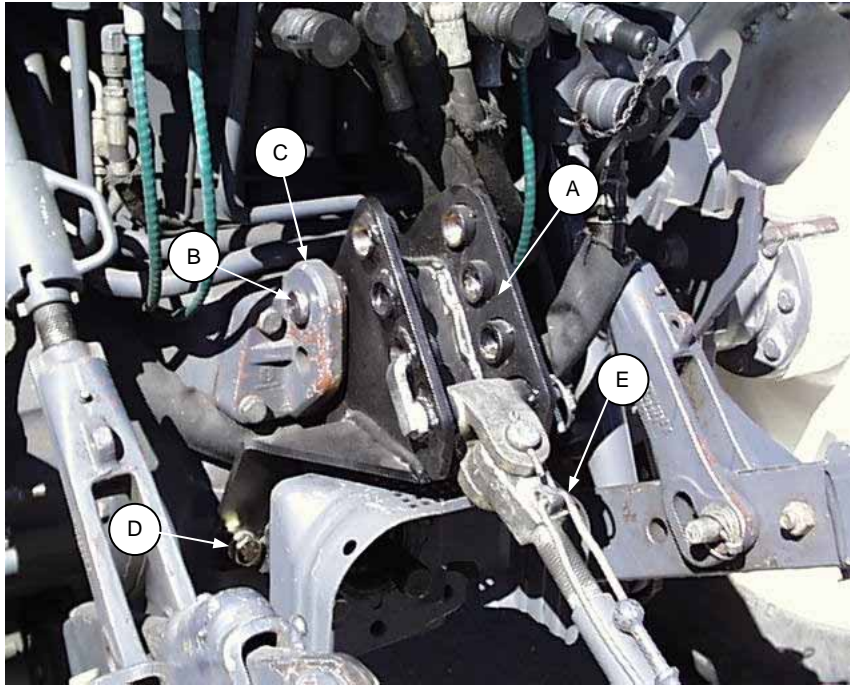

3. Tighten all hardware.